



Mud Logging Contractor's Flare Gas Emissions Monitoring Requirements are Met with Help from Thermal Mass Flow Meter

Steve Cox, Sr Member Technical Staff • Fluid Components International (FCI)
1755 La Costa Meadows Drive, San Marcos, CA 92078
Email: SCox@FluidComponents.com • Web: www.FluidComponents.com • Tel: 760-744-6950

Around the globe, upstream oil/gas production companies depend on mud logging service companies to analyse mud samples that help them maintain the correct direction for their drilling field operations. During the mud logging process, samples of rock cuttings from bore holes are brought to the surface by recirculating drilling media (mud) for analysis by a mobile laboratory to determine the lithology and fluid content of the sample.

Oil/gas engineers utilise the surface logging process to help determine the correct drilling direction and depth when first commissioning a new well. The drilling operation including mud logging and data analysis can take from three to four weeks. During this time, drilling mud is pumped down the hole to help keep the bit from overheating and to bring rock cuttings to the surface for analysis.

Mud data is logged by the engineers from the logging service company and the production company. A careful analysis of this data helps the engineers confirm the presence of oil and gas to maintain drilling efficiency.

Problem

Natural gas is typically present as the mud is returned to the surface from down the hole. A gas buster is used to separate out the gas from the mud. Then the mud is recycled back to the drilling (logging) system, and the natural gas is vented to a flare stack and burned off at low flow rates typically from 15 to 20 fps.

The European Union, the U.S. Environmental Protection Agency (EPA) and other global organizations require measurement and reporting of these flare gas emissions from mud logging operations (Fig 1).



Fig 1. Oil/Gas wellhead with flare gas burning

Mud logging service companies need an accurate, reliable gas flow meter able to measure gas flow at relatively low flow rates with the added benefit of low pressure drop in order to provide the required, accurate data.

In an oil/gas field employing hydraulic fracturing technology, a major mud logging service company recently began searching for a flare gas flow measurement solution that supported these difficult operational requirements and that would help it meet the environmental regulations. Engineers at the company needed to measure flare gas accurately and reliably at the well head and then find a convenient way to gather the data for agency compliance flare gas reporting. Typical environmental agency regulations normally require flare gas monitoring and reporting that stipulates flow meter accuracy of $\pm 5\%$ of reading or better throughout the entire measuring range.

Accurate flare gas measurement during mud logging presents a challenging environment for any flow meter. The meter has to accurately measure the extremely low flow rates within the $\pm 5\%$ of reading requirement. Any changes in gas production can also result in a wide turndown requirement that makes it difficult to achieve this accuracy level.

Solution

Fluid Components International (FCI) was contacted by the mud logging service company for a possible solution. The applications team at FCI recommended the company's ST100 Series Thermal Mass Gas Flow Meter (Fig 2), which provides acceptable accuracy at low flow rates combined with a turndown far in excess of 100:1. The meter also includes integral data logging, and the meter's insertion style probe offered low pressure drop.

The unique hot-tap design of the ST100 meter allows the insertion type probe to be inserted directly into the surface logging gas monitoring system without the need to shut the process down. This meter includes a display totaliser (Fig 3), which can be read every 24 hours together with an internal data logger SD card to log flow data up to 90-days. All the flow data is captured, stored, and easily exported to a Microsoft Excel spreadsheet via USB cable connection or by removal of the SD card. In this case the flow meter process connection is a 1-inch 300# flange. Pressure conditions at the well head can range from 10 to 250 psig (0.07 to 1.7 KPA(g)) at temperatures from 50 to 500°F (10 to 260°C). The gas flow rate was 23 to 1200 SCFM (0.65 to 34 NCMM), and the media was a seven component mixed gas. A remote transmitter was located over 50 feet away in a heated location because of extreme cold weather conditions, which allows the LCD display to show mass flow rate and totalised mass flow.

The thermal dispersion constant power technology utilised by FCI's flow meters provides direct mass flow measurement without the need for additional pressure and temperature transmitters, which are required by volumetric type flow instruments such as differential pressure (dP) orifice plate meters, vortex shedding, ultrasonic and other meter technologies. The meter chosen by the mud logging company includes this built-in temperature compensation technology, which automatically compensates for changes in gas properties based on varying process temperatures.

The advanced constant power design developed by FCI for thermal dispersion mass flow measurement allows the reference RTD temperature measurement to be used as an additional output. (Fig 4). This constant power technology has proven to be highly reliable and is preferred in moist gas applications where the naturally damped constant power design helps prevent the output "pegging" to 20 mA with the presence of moisture. The heated sensor provides a drying effect, which results in a stable and repeatable reading. FCI's meters are designed with a rugged thermal mass flow sensing element comprised of two all-welded 316L stainless steel thermowells, with two precision matched platinum resistance temperature detectors (RTDs). This highly reliable no-moving parts design uses a heated RTD relative to the reference RTD, which creates a temperature differential relative to the gas flow rate.

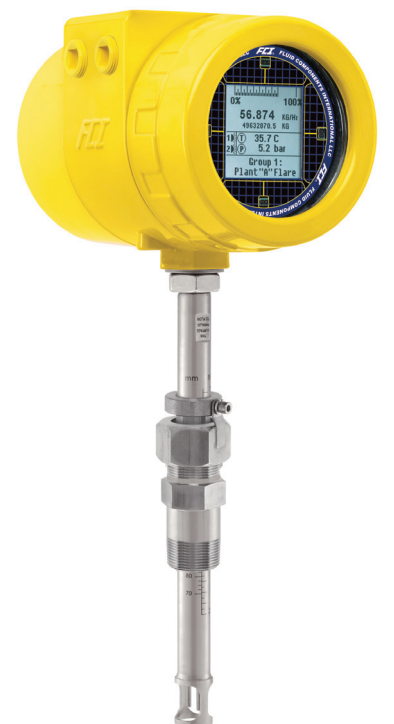


Fig 2. The ST100 Flow Meter

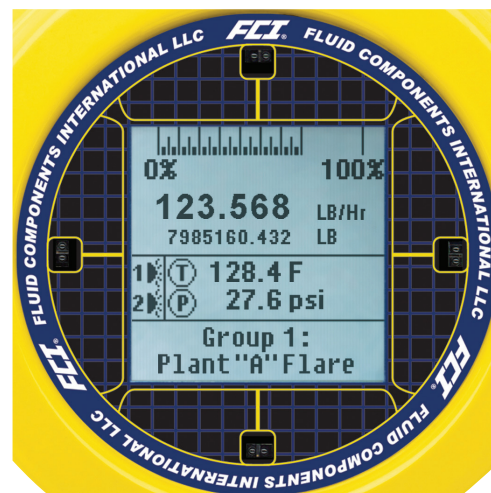


Fig 3. Close-up view of the ST100 display

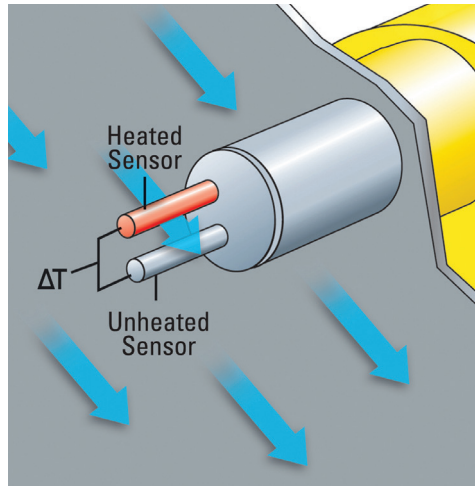


Fig 4. Graphic of the thermal dispersion theory of operation

For applications flexibility, the ST100 meter can be factory calibrated to measure virtually any process gas, including wet gas, mixed gases and dirty gases. The basic insertion style air/gas meter features a thermal flow sensing element that measures flow from 0.25 to 1000 SFPS (0.07 NMPS to 305 NMPS) with accuracy of ± 0.75 percent of reading, ± 0.5 percent of full scale.

This meter is agency approved for hazardous environments, including the entire instrument, the transmitter and the rugged, NEMA 4X/IP67 rated enclosure. Instrument approvals include ATEX, IECEx, FM and FMc.

Conclusion

The mud logging service company is pleased with the performance of the ST100 flow meter, which made it easier to meet the flare gas reporting requirements in the region where it was operating. The advantages of this flow meter in this mud logging application included low flow sensitivity to 0.25 fps, multiple calibration groups, low pressure drop and easy, low cost installation. In the future, the company plans to expand use of this meter as it receives new contracts to commission additional oil/gas wells.